


Blood Bank Refrigerator

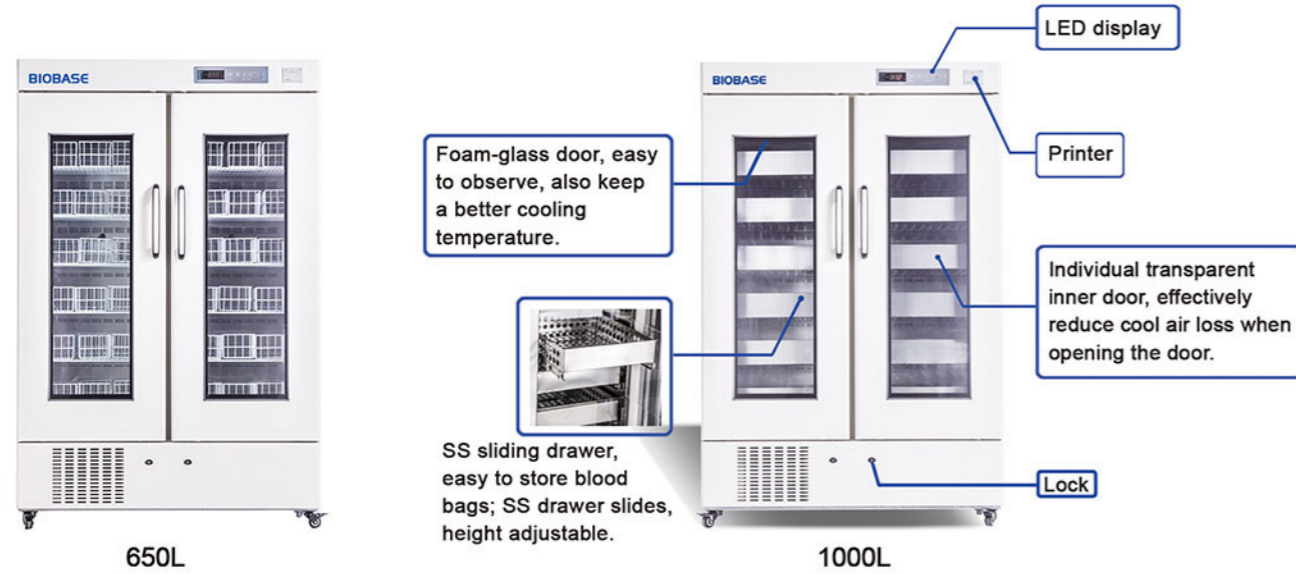

Technical Parameters

Model	BBR-4V650	BBR-4V1000
Capacity	650L	1000L
Temp. Range	4±1°C	
Temp. Accuracy	0.1°C	
Control System	Microprocessor control	
Display	LED display	
Alarm	Audio and visual alarm for: High or low temperature, Sensor & system failure; Door ajar, Power failure, Low battery	
Refrigeration Type	Forced air refrigeration system	
Refrigerant	R134a, CFC-Free	
Defrost	Auto defrost	
Construction	Unibody Design, Mono-assembly foaming (Rigid polyurethane insulation material)	
Material	Internal Material	Stainless steel
	External Material	Cold-rolled steel with anti-bacteria powder coating
Door	Double layer transparent glass door with lock, Heating film preventing frosting, Sealing joint strip with magnetic force. Transparent plastic inner door	
Drawers/Shelves	Adjustable shelves	SS drawers
Casters	4 casters	4 casters
Consumption	364W	513W
Power Supply	AC110V/220V±10%, 50/60Hz	
Blood Bags (450ml)	360 pcs	576 pcs
Standard Accessory	Temperature printer, 12 shelves, 36 baskets, LED lamp, probe access port, door key	Temperature printer, 12 drawers, LED lamp, probe access port, door key
Optional Accessory	Temperature recorder	
External Size(W*D*H) mm	1220*648*1885	1220*878*1885
Package Size(W*D*H) mm	1300*735*2110	1300*960*2130
Gross Weight	257kg	335kg

Laboratory Refrigerator(2-8°C)

